




IEC LOCK

Appliance Outlet

Technical Information

- Snap-in mounting from front
- Solder terminal or quick connect from single terminal
- Protection Class 1
- Integral plug retention feature

Dimensional Data & Panel Preparation

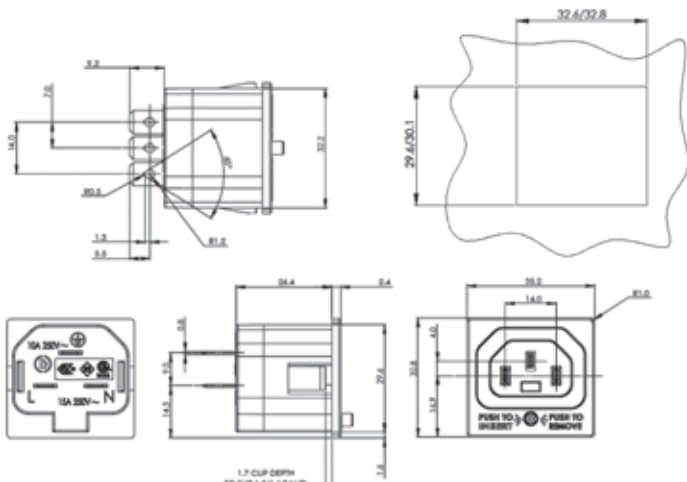

Technical Data

Rated current/voltage 10A /250 VAC

Insulation resistance
10MΩ(500 VDC, 1 Min.)

Dielectric Strength: 2KV (50 Hz,
1 Min.) to accessible surfaces

Material: Socket – Thermoplastic,
black, UL94V-0

Standards

IEC/EN 60320-2-2/F

Approvals

ENEC (10 A/250VAC)

ETLus (15 A/250VAC)

Part Ref

PA050

PA049

Description

Black IEC320 Snap in 1.5mm Panel Thickness

White IEC320 Snap in 1.5mm Panel Thickness

Terminal Type

Quick Connect/Solder 6.3 x 0.8 mm

Quick Connect/Solder 6.3 x 0.8 mm